

A Smart Renewable Energy Solution

20W

All-in-One Integrated Solar LED Street Light

Specifications

HT-SS-4520

Document version: **HT-SS-4520-SPEC-V3.0**

Jan. 2016

Key Features:

- All-in-one integrated compact design;
- No external wires or cables needed;
- Using high brightness Bridgelux chips from USA, efficiency upto 150LM/W;LED light 125LM/W
- Professional optical lens design adopts light transmittance over 92%,light utilization over 45%;
- Sunpower monocrystalline PV from USA adopt over 22% conversion efficiency;
- High quality lithium Iron phosphate(LiFePO4) battery adopt lifetime over 2000cycles(5~8 years);
- 100% solar powered green renewable energy;
- Auto turn on at dusk and turn off at dawn;
- PIR motion sensor optional, help to save more power;
- Patent pended elegant design adopts corrosion protection


Benefits:

- Small volume helps to save freight cost and storage cost;
- No need trenching or wiring job ,reduce labor cost and materials cost;
- Renewable energy ,no electronic bills any more;
- Professional light distribution design eliminate the light waste;
- High quality durable components ensure 5 to 8 years no maintenance;
- User friendly. Plug & Play design. Fast installation. No need training;
- Green light reduce fossil fuel consumption, eliminating pollution;
- Battery backup for cloudy and rainy days;
- IP65 design suitable for any place where is sufficient sunshine

Applications:

residential road, parking lot,pathway,ramp,farm & ranch lighting,wildlife area, dock& pier,military,personal garden,plaza,street,highways.....any exterior area wherever there is sufficient sunlight.

Introduction:

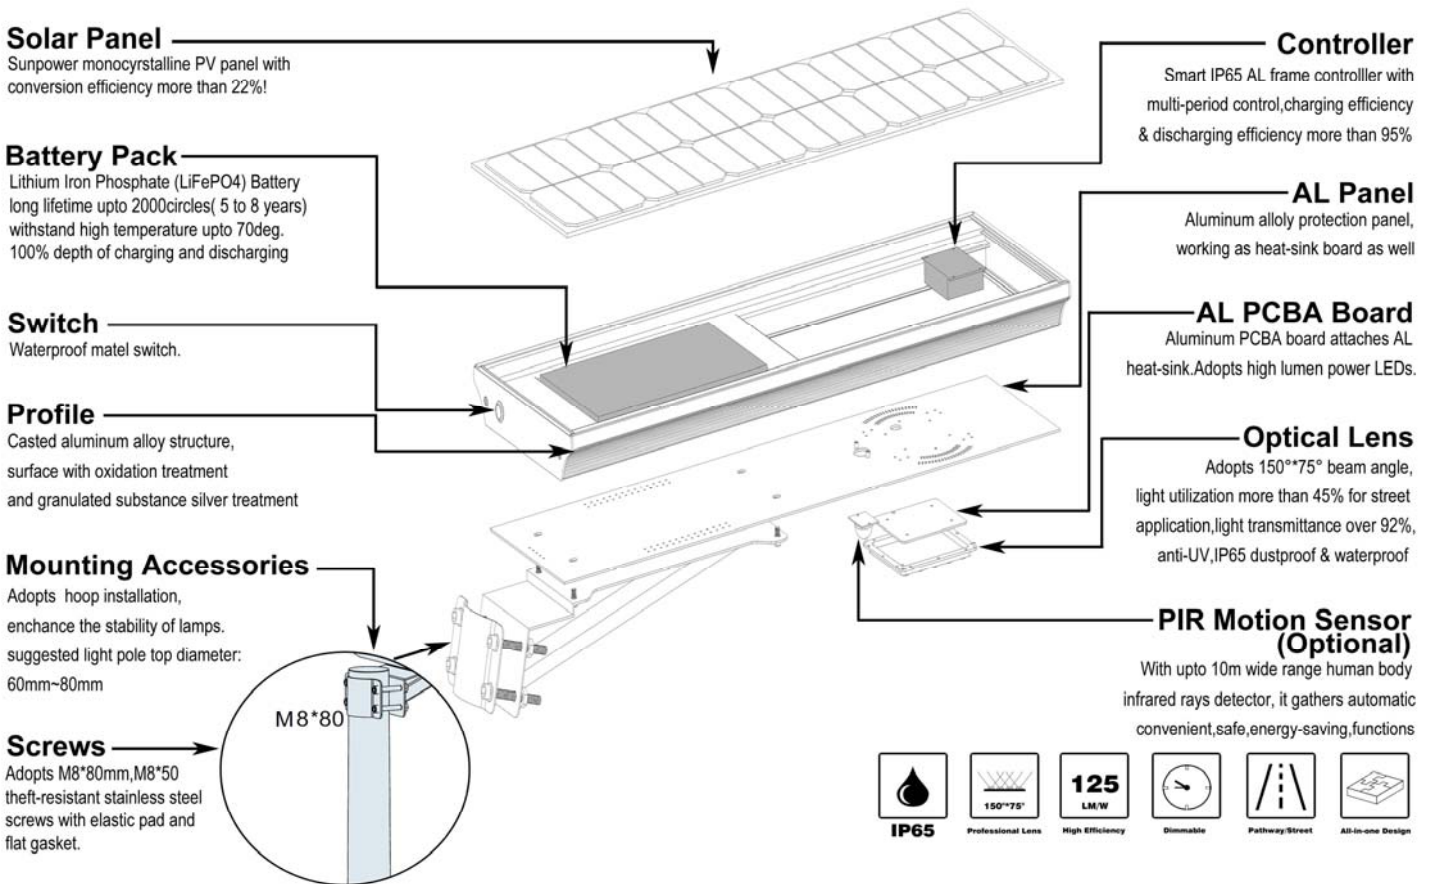

Hitechled Optoelectronics Co.,Ltd.

Office Add.: 21st F, Bldg.B, GLC Plaza, Baoming 2nd Road, Bao'an district, Shenzhen, China 518102

Tel: +86 755 33653232

Fax: +86 755 33653211

E-mail: sales@hitechled.cn

Http://www.hitechled.cn

HT-SS-4520 All-in-one Solar LED Light Specifications:

Parameter		Value
Solar panel (Sunpower from USA)	Max power	18V 45W
	Life time	25 years
Battery	Type	230WH LiFePO ₄ battery
	Life time	>2,000 Circles (more than 5 years)
LED Lamp	Max power	20W
	LED chip brand	Bridgelux from USA
	Lumen (LM)	2,000-2,500lm
	Life time	50,000hours
	Viewing Angle	150°/75°
Charging time	by sun(strong)	5~6hours
Discharging time	Full power	>12hours
	Saving mode	3 to 5 days
Working temperature	Range(°C)	-20℃~+60℃
Color temperature	Range(k)	6000k~6500k(optional)
Mounting height	Range (m)	3-5m(suggested)
Space between light	Range (m)	10-20m(suggested)
Housing material	Aluminum alloy	
Certificate	CE / ROHS / IP65	
Packing & Weight	Product size	868*281*138mm
	NW.for one unit	12kg
	Carton size	930*340*210 mm
	Q'ty/ctn	1sets/ctn
	GW.for carton	14kg
Container load	20GP	400pcs
	40GP	800pcs

Lamp Size Chart

Physical Pictures

Intensity Distribution Diagram

Comparasion:

* Contents are subject to change without prior notice.

Tradional Light Distribution			Hitechled All-in-one Solar LED Light Distribution		
		Light Utilization <28%			Light Utilization >45%

Hitechled Optoelectronics Co.,Ltd.

Office Add.: 21st F, Bldg.B, GLC Plaza, Baoming 2nd Road, Bao'an district, Shenzhen, China 518102

☎ Tel: +86 755 33653232

☎ Fax: +86 755 33653211

✉ E-mail: sales@hitechled.cn

🌐 Http://www.hitechled.cn