

A Smart Renewable Energy Solution

60W

All-in-One Integrated Solar LED Street Light

Specifications

HT-SS-1H60

Document version: **HT-SS-1H60-SPEC-V3.0**

Jan. 2016

Key Features:

- All-in-one integrated compact design;
- No external wires or cables needed;
- Using high brightness Bridgelux chips from USA, efficiency upto 150LM/W; LED light 125LM/W;
- Professional optical lens design adopts light transmittance over 92%,light utilization over 45%;
- Sunpower monocrystalline PV from USA adopt over 22% conversion efficiency;
- High quality lithium Iron phosphate(LiFePO4) battery adopt lifetime over 2000cycles(5~8 years);
- 100% solar powered green renewable energy;
- Auto turn on at dusk and turn off at dawn;
- PIR motion sensor optional, help to save more power;
- Patent pended elegant design adopts corrosion protection


Benefits:

- Small volume helps to save freight cost and storage cost;
- No need trenching or wiring job ,reduce labor cost and materials cost;
- Renewable energy ,no electronic bills any more;
- Professional light distribution design eliminate the light waste;
- High quality durable components ensure 5 to 8 years no maintenance;
- User friendly. Plug & Play design. Fast installation. No need training;
- Green light reduce fossil fuel consumption, eliminating pollution;
- Battery backup for cloudy and rainy days;
- IP65 design suitable for any place where is sufficient sunshine

Applications:

residential road, parking lot,pathway,ramp,farm & ranch lighting,wildlife area, dock& pier,military,personal garden,plaza,street, highways.....any exterior area wherever there is sufficient sunlight.

Introduction:

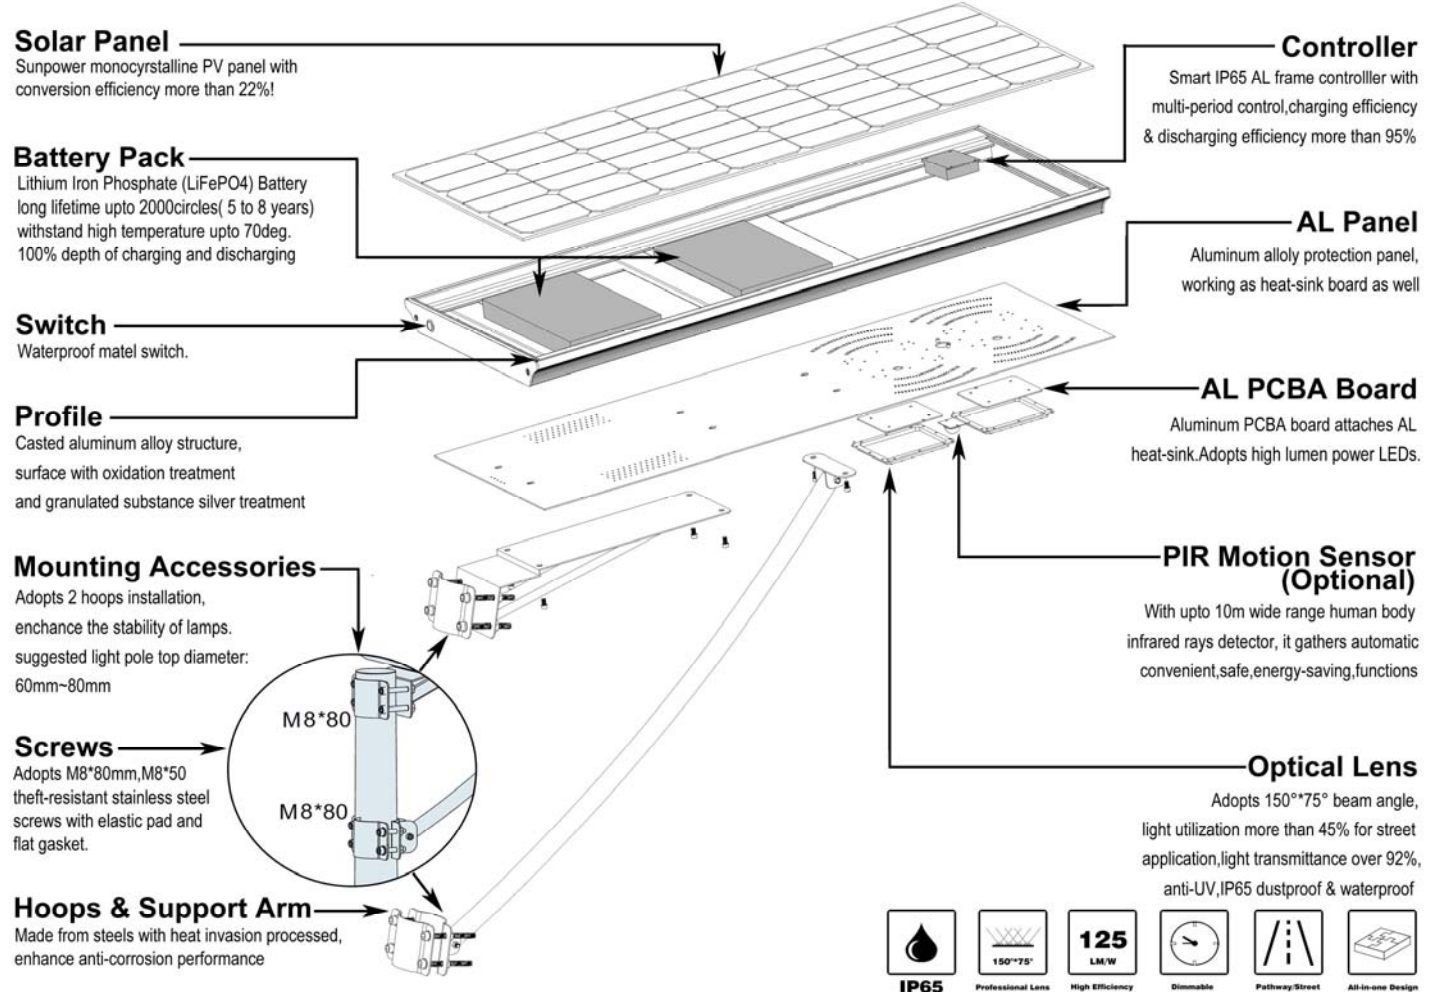

Hitechled Optoelectronics Co.,Ltd.

Office Add.: 21st F, Bldg.B, GLC Plaza, Baoming 2nd Road, Bao'an district, Shenzhen, China 518102

Tel: +86 755 33653232

Fax: +86 755 33653211


E-mail: sales@hitechled.cn

Http://www.hitechled.cn

HT-SS-1H60 All-in-one Solar LED Light Specifications:

Parameter		Value
Solar panel (Sunpower from USA)	Max power	100W
	Life time	25 years
Battery	Type	614WH LiFePO ₄ battery
	Life time	>2,000 Circles (more than 5 years)
LED Lamp	Max power	60W
	LED chip brand	Bridgelux from USA
	Lumen (LM)	6,600-7,600lm
	Life time	50,000hours
	Viewing Angle	150°/75°
Charging time	by sun(strong)	6~7hours
Discharging time	Full power	>10hours
	Saving mode	3 to 5 days
Working temperature	Range(°C)	-20°C~+60°C
Color temperature	Range(k)	6000k~6500k(optional)
Mounting height	Range (m)	6-9m(suggested)
Space between light	Range (m)	20-30m(suggested)
Housing material	Aluminum alloy	
Certificate	CE / ROHS / IP65	
Packing & Weight	Product size	1350*410*138mm
	NW.for one unit	26kg
	Carton size	1420*480*210 mm
	Q'ty/ctn	1sets/ctn
	GW.for carton	29kg
Container load	20GP	160pcs
	40GP	330pcs


Lamp Size Chart

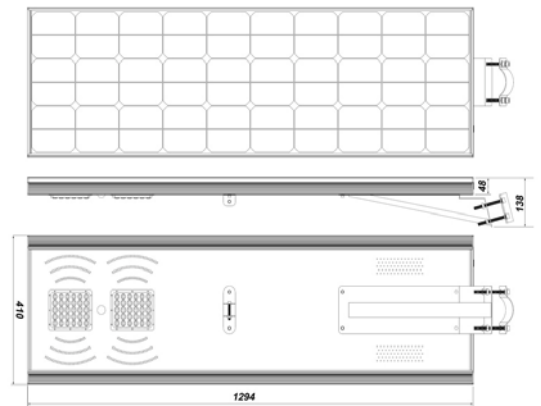

Physical Pictures



Intensity Distribution Diagram

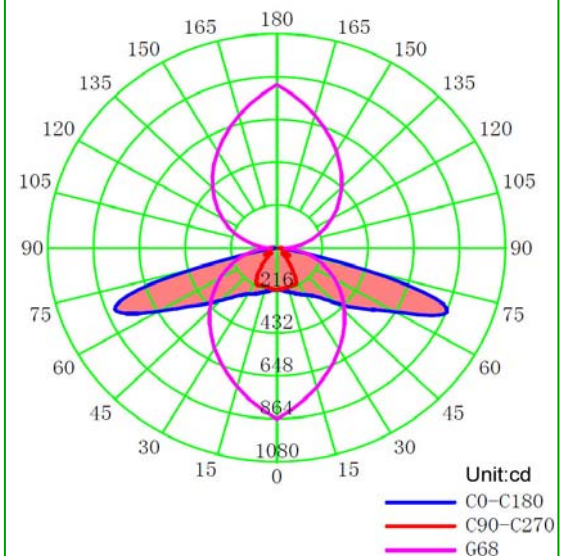


Comparasion:

* Contents are subject to change without prior notice.

Traditional Light Distribution



Hitechled All-in-one Solar LED Light Distribution

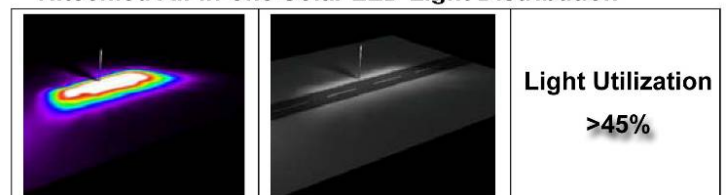

Hitechled Optoelectronics Co.,Ltd.

Office Add.: 21st F, Bldg.B, GLC Plaza, Baoming 2nd Road, Bao'an district, Shenzhen, China 518102

☎ Tel: +86 755 33653232

☎ Fax: +86 755 33653211

✉ E-mail: sales@hitechled.cn

🌐 Http://www.hitechled.cn